


PRODUCT DATA SHEET

Collection	SALSA
------------	--------------

1. Product description

3-layer lacquered product made for residential use on dry and flat surface	
Construction	3-strip, 3-layer
Installation	„floating“ or glue down
Thickness (mm)	~ 14
Width (mm)	194
Length (mm)	2.283
Wear layer thickness (mm)	~ 3,6
Weight (kg/m ²)	~ 7,3±10%

2. Construction: 3-layer

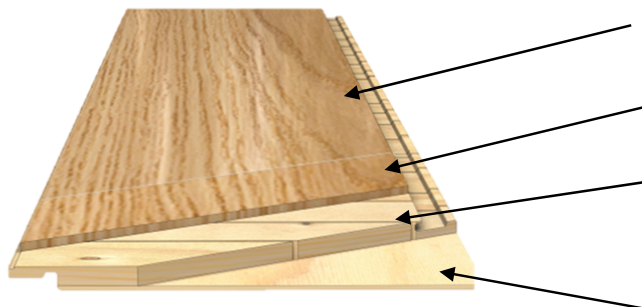

5 (brushed) or 6 layers (not brushed products) of Proteco STRONG lacquer and Proteco Natura

Hardwood wear layer – 3-strips

Softwood middle layer with transverse wood fibres that contributes to the stability of the boards

Veener bottom layer ensures dimensional



Wear layer
Hardwood



Middle layer
Softwood



Bottom layer
Veener

3. Surface protection

UV lacquer

Proteco STRONG - gloss 9, 30 and 70

4. Profile: T-lock



5. Installation

Installation



Disassembling



„Floating“ or glue down installation.

Surface must be clean, dry and flat.

Air humidity: 30-50%.

<http://www.wood.tarkett.rs/CustomerSupport/Documents/Installation%20for%20Wood%20Flooring.pdf>

6. Underfloor heating compatibility*

Since wood is a living material, during the heating season, minor gaps might develop between wood flooring boards due to interior climate conditions. These gaps cannot be related to product quality. Boards movement can be minimized by keeping temperature level at approx. 20° C and a relative air humidity at approx. 50 %.

*Not suitable for the wood species beech and maple

7. Care and maintenance

<p>Wet mopping or vaccuming</p>  <p>Wet mopping with almost dry cloth.</p> <p>Use protective pads when moving furniture.</p>	<p>Dry cleaning</p>  <p>Dry mopping Vaccum cleaning</p>
<p>Cleaning</p>	
<p>Regular</p> <ul style="list-style-type: none"> • Tarkett Cleaner 	<p>Periodical</p> <ul style="list-style-type: none"> • Tarkett Refresher 



8. Assessment of compliance EN 14342:2005+A1:2008

Feature	Standard	Report	Date	Result
3-layer wood flooring	EN 13489:2002	000070-000-13 Euroinspekt- drvokontrola 53	27.02.2013	fulfilled
Lacquered surface feature	EN 14354:2004	000072-000-11 Euroinspekt- drvokontrola 41	24.03.2011	fulfilled
Reaction to fire	EN 13501-1:2007 +A1:2009	017-02-10 Euroinspekt- drvokontrola 38	22.02.2010	Dfl - S1
Content of formaldehyde	EN 120:1992	058-02-12 Euroinspekt- drvokontrola 49	11.06.2012	E 1
Emission of formaldehyde	EN 717-1:2004	F721568 SP 0	26.11.2007	E 1
Content of PCP	EN 14342:2005 +A1:2008	000114-000-08 Euroinspekt- drvokontrola 4	21.04.2008	< 5 ppm
Breaking strength	EN 1533:2010	000118-000-08 Euroinspekt- drvokontrola 8	15.05.2008	3,5 kN
Slipperiness	CEN/TS 15676:2007	000209-000-12 Euroinspekt- drvokontrola 52	7.11.2012	non-brushed surface USRV 29
		000210-000-12 Euroinspekt- drvokontrola 51	7.11.2012	brushed surface USRV 56
Thermal conductivity	EN 12664:2001	000035-000-10 Euroinspekt- drvokontrola 36	10.02.2010	0.11 W/m,K
Biological durability	EN 335-2:2006	000051-000-09 Euroinspekt- drvokontrola 20	16.03.2009	class 1

Tarkett d.o.o. based on results of testing in accredited laboratories and on compliance mark, affix the CE marking to all products.

Date:

9.12.2013.

Responsible person:

.....